





Célula de Carga / Capteur de Pesage / Load Cell

CT-A0

E_{max}: 50–75–100–150–200–250–300 kg

Ref: CTA0

- Acero niquelado
- Grado de protección IP67
- Para básculas de 4 células
- Acier nickelé
- Étanchéité IP67
- Application: plates-formes de 4 capteurs
- Steel alloy
- Protected against humidity IP67
- For 4 load cells platforms

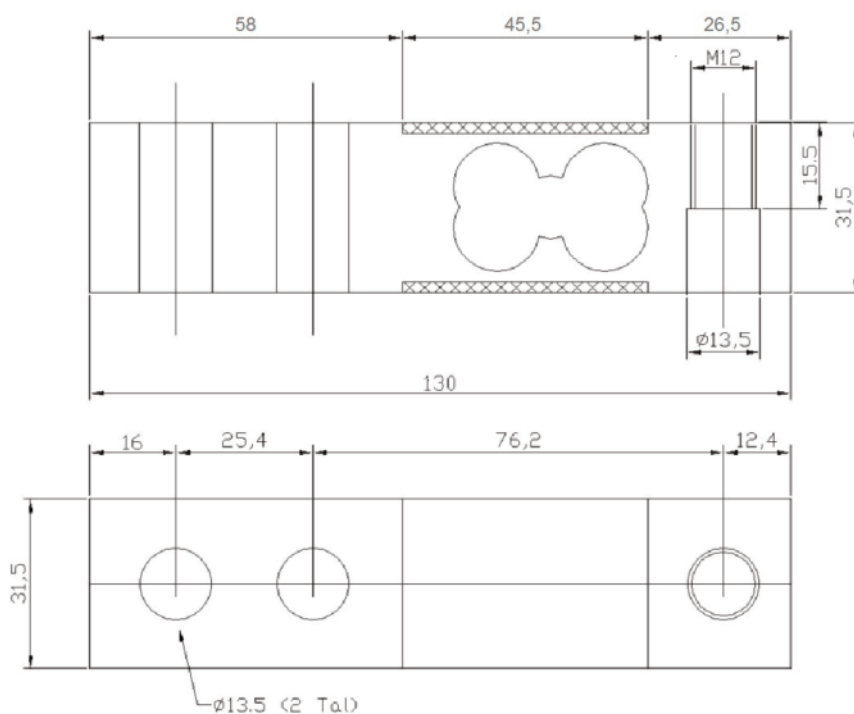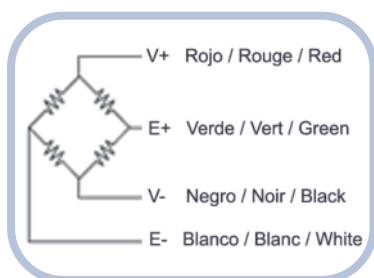

Clase de Precisión	Clase de précision	Accuracy Class	C3
V _{min}	V _{min}	V _{min}	E_{max} / 10.000
Sensibilidad	Sensibilité	Rated output	2 mV/V ± 0.1%
Tensión de alimentación	Tension d'alimentation	Excitation voltage	5 ÷ 15 V
Resistencia de entrada	Résistance d'entrée	Input resistance	350 Ω ± 10 Ω
Resistencia de salida	Résistance de sortie	Output resistance	350 Ω ± 4 Ω
Resist. de aislamiento	Résist. d'isolement	Insulation resistance	> 5000 MΩ (50Vdc)
Margen de temperatura	Marge de température	Temperature limits	-10° / +40°C
Grado de protección	Étanchéité	Protected against humidity	IP-67
Longitud del cable	Longueur du câble	Cable length	5 m